



A vibrant with 3D effect and durable wall covering designed to absorb sound and reduce reverberated noise.

ADVANTAGES


- Excellent acoustic properties
- Durable, safe, non-irritant
- Resistant for fading
- Easy to maintain and clean

APPLICATIONS

- Classrooms
- Corridors
- Pin Boards
- Staff Rooms
- Offices
- Meeting Rooms
- Interview Rooms

ACOUSTIC PERFORMANCE

Classroom and Corridors have a Noise Reduction Coefficient (NRC) of 0.4. Standard 9mm thick is the most effective on mid to high frequency sounds, such as reverberated noise from speech. For low frequency absorption we recommend thicker framework such as EKOUS E WALL system. Kindly contact us for guidance.

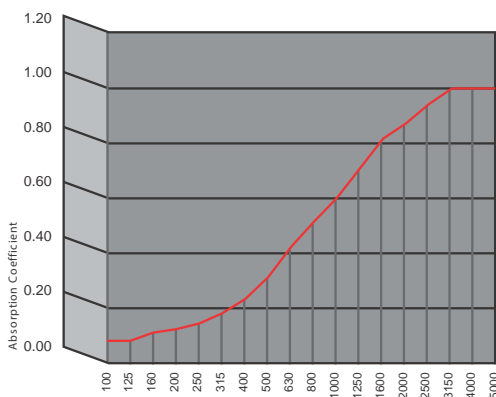

MAINTENANCE

Light vacuuming to prevent dust build up is recommended. Most marks can be cleaned with a mild detergent solution followed by rinsing and blotting. Refer to our stain treatment guide to remove stains

INSTALLATION SERVICE

EKOUS offers an installation service. Alternatively we can support your installers to ensure the product is installed correctly.

Important: The contents of this document are to be used solely for guidance purposes and are not intended to form part of any contract. Product specifications may be subjected to changes. All goods supplied by the Company are made to approve standards, However, no warranty or guarantee is given as to product suitability for any given application and no liability is accepted for any loss or damage arising directly or indirectly from the use of the company's products irrespective of any advice given.

TECHNICAL INFO

Specification

Product Name	: Ekous - Sonata
Composition	: 100% PET (50% recycled)
Thickness	: Standard 9mm
Panel Dimension	: 1220mm X 2440mm
Panel Weight	: 6 Kg

Performance

Sound Absorption	: ISO 354 - 2006
NRC Value	: 0.35 (with no air gap) 0.55 (with 20mm air gap) 0.75 (with 50mm air gap)
Emissions	: VOC & Formaldehyde free
Compliance	: ROHS free

AVAILABLE COLOR

