

ekous® ACOUSTIC WALL COVERING 9mm Sonata



A vibrant and durable wall covering designed to absorb sound and reduce reverberated noise. Classroom and Corridor are specially suited to schools and nurseries where it doubles as a pin board for displaying work.

ADVANTAGES


- Excellent acoustic properties
- Durable, safe, non-irritant
- Resistant for fading
- Easy to maintain and clean

APPLICATIONS

- Classrooms
- Corridors
- Pin Boards
- Staff Rooms
- Offices
- Meeting Rooms
- Interview Rooms

ACOUSTIC PERFORMANCE

Classroom and Corridors have a Noise Reduction Coefficient (NRC) of 0.4. Standard 9mm thick is the most effective on mid to high frequency sounds, such as reverberated noise from speech. For low frequency absorption we recommend thicker framework such as EKOUS E WALL system. Kindly contact us for guidance.

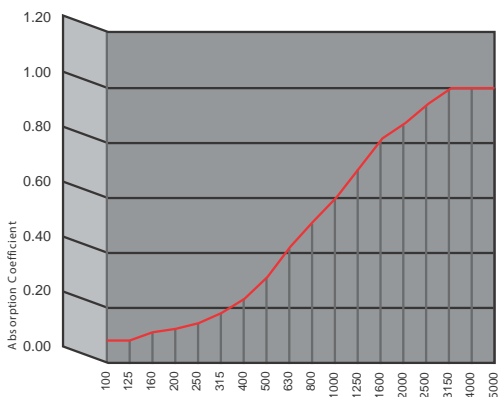

MAINTENANCE

Light vacuuming to prevent dust build up is recommended. Most marks can be cleaned with a mild detergent solution followed by rinsing and blotting. Refer to our stain treatment guide to remove stains

INSTALLATION SERVICE

EKOUS offers an installation service. Alternatively we can support your installers to ensure the product is installed correctly.

TECHNICAL INFO

Specification

Product Name	: Ekous - Sonata
Composition	: 100% PET (50% recycled)
Thickness	: Standard 9mm
Panel Dimension	: 1220mm X 2440mm
Panel Weight	: 6 Kg

Performance

Sound Absorption	: ISO 354 - 2006
NRC Value	: 0.35 (with no air gap) 0.55 (with 20mm air gap) 0.75 (with 50mm air gap)
Emissions	: VOC & Formaldehyde free
Compliance	: ROHS free

AVAILABLE COLOR



13-1 to 13-6, Block F1, Jalan PJU 1/42,
Dataran Prima, 47301, Petaling Jaya,
Selangor Darul Ehsan, Malaysia.

T: +603 - 7804 9111
F: +603 - 7804 0111
E: info@ekous.net
www.ekous.net



SWEDEN • MALAYSIA • THAILAND • SINGAPORE • INDIA • PHILIPPINES • HONG KONG